KITCHEN REMODEL

Dimensioned cabinet & layout drawings for the contractor



Design render — looking at the cabinet wall from the living room



Design render — island, range wall and fridge / pantry

GENERAL NOTES

1. All dimensions come from the 3D design model (SketchUp → Blender), not from field measurement. Verify every dimension on site before ordering cabinets, stone or appliances.
2. Do not scale drawings — use the written dimensions. Sheets are laid out for 11×17 (tabloid); stated scales apply only at 100% print size.
3. Plan dimensions run from the finished inside face of the Breakfast (left) wall and the cabinet (back) wall. Heights are above finished floor (AFF).
4. Cabinet sizes are box widths. Back-wall fronts are FULL OVERLAY on the face frames (⅛" gaps): beaded shaker (flat recessed panels), shallow top drawers flat slab; island fronts stay inset in its face frame, same styling. All cabinetry (towers, fridge panels, uppers, bases, island) painted cream. Uppers are STACKED (tall door + 12" top door) and rise into a 2" painted soffit under the 4" top band; both tall towers and the fridge column are capped by a classical cornice to the ceiling. Toe kick 4" high (island: open 4" base on corner posts); countertops honed black stone, ogee edge, 1⅜" thick (model), 1" front overhang.
5. Appliance openings were sized to the UAKC spec package (invoice 255075, v2.2) — see A-502 for every requirement, utility and panel size. Confirm against the installation guide in each box.
6. The model has no outlets, switches or plumbing rough-in. Only fixture locations (A-401) and appliance/sink centerlines are given.
7. Wall thickness is drawn nominal (3"). Hood and marble mantel, tower cornices, fridge surround and island furniture details are design intent — shop drawings to follow from the cabinetmaker / fabricator.

SHEET INDEX

A-001	Cover, notes & index
A-101	Overall floor plan
A-102	Kitchen plan — dimensioned
A-201	Cabinet wall elevation
A-202	Island elevations
A-203	Side wall elevations
A-301	Sections through range and sink
A-401	Lighting / reflected ceiling plan
A-402	Existing ceiling (site survey)
A-501	Cabinet & appliance schedules
A-502	Appliance requirements (spec check)

KEY DIMENSIONS

Room, wall to wall (cabinet wall)	21'-1"
Ceiling height	9'-0"
Counter height	36"
Upper cabinets, bottom AFF	54⅛"
Upper cabinets, top AFF	8'-6"
Hood bottom AFF (mantel legs)	5'-5⅞"
Island top	8'-6"
Aisle, counter edge to island	48¼"

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

COVER, NOTES & INDEX

General notes · sheet index · design intent

A-001

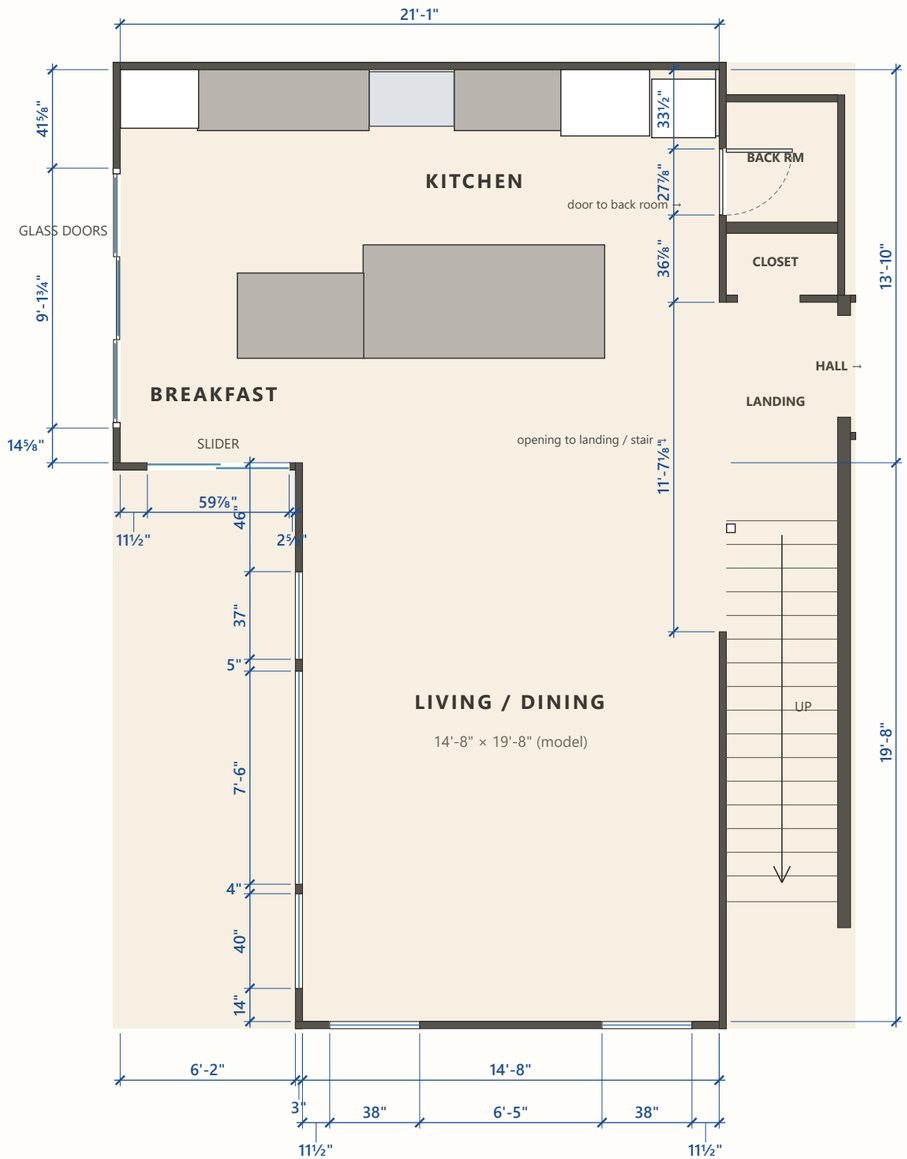

LEGEND

- Wall (nominal 3")
- Window / glass door
- Black stone counters (all)
- Tall cabinet / appliance panel
- Door (swing shown dashed)

Room names follow the floor plan supplied by the owner. Living / Dining walls and windows, and the hall, closet, back room and stair beyond the right wall, are approximate — verify on site. The stair goes UP toward the living-room end; no header at the landing.

1 **OVERALL FLOOR PLAN**

3/16" = 1'-0" at 11×17 · living-room windows ≈ (from the owner's photos)

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

OVERALL FLOOR PLAN

Kitchen, Breakfast and Living / Dining

A-101

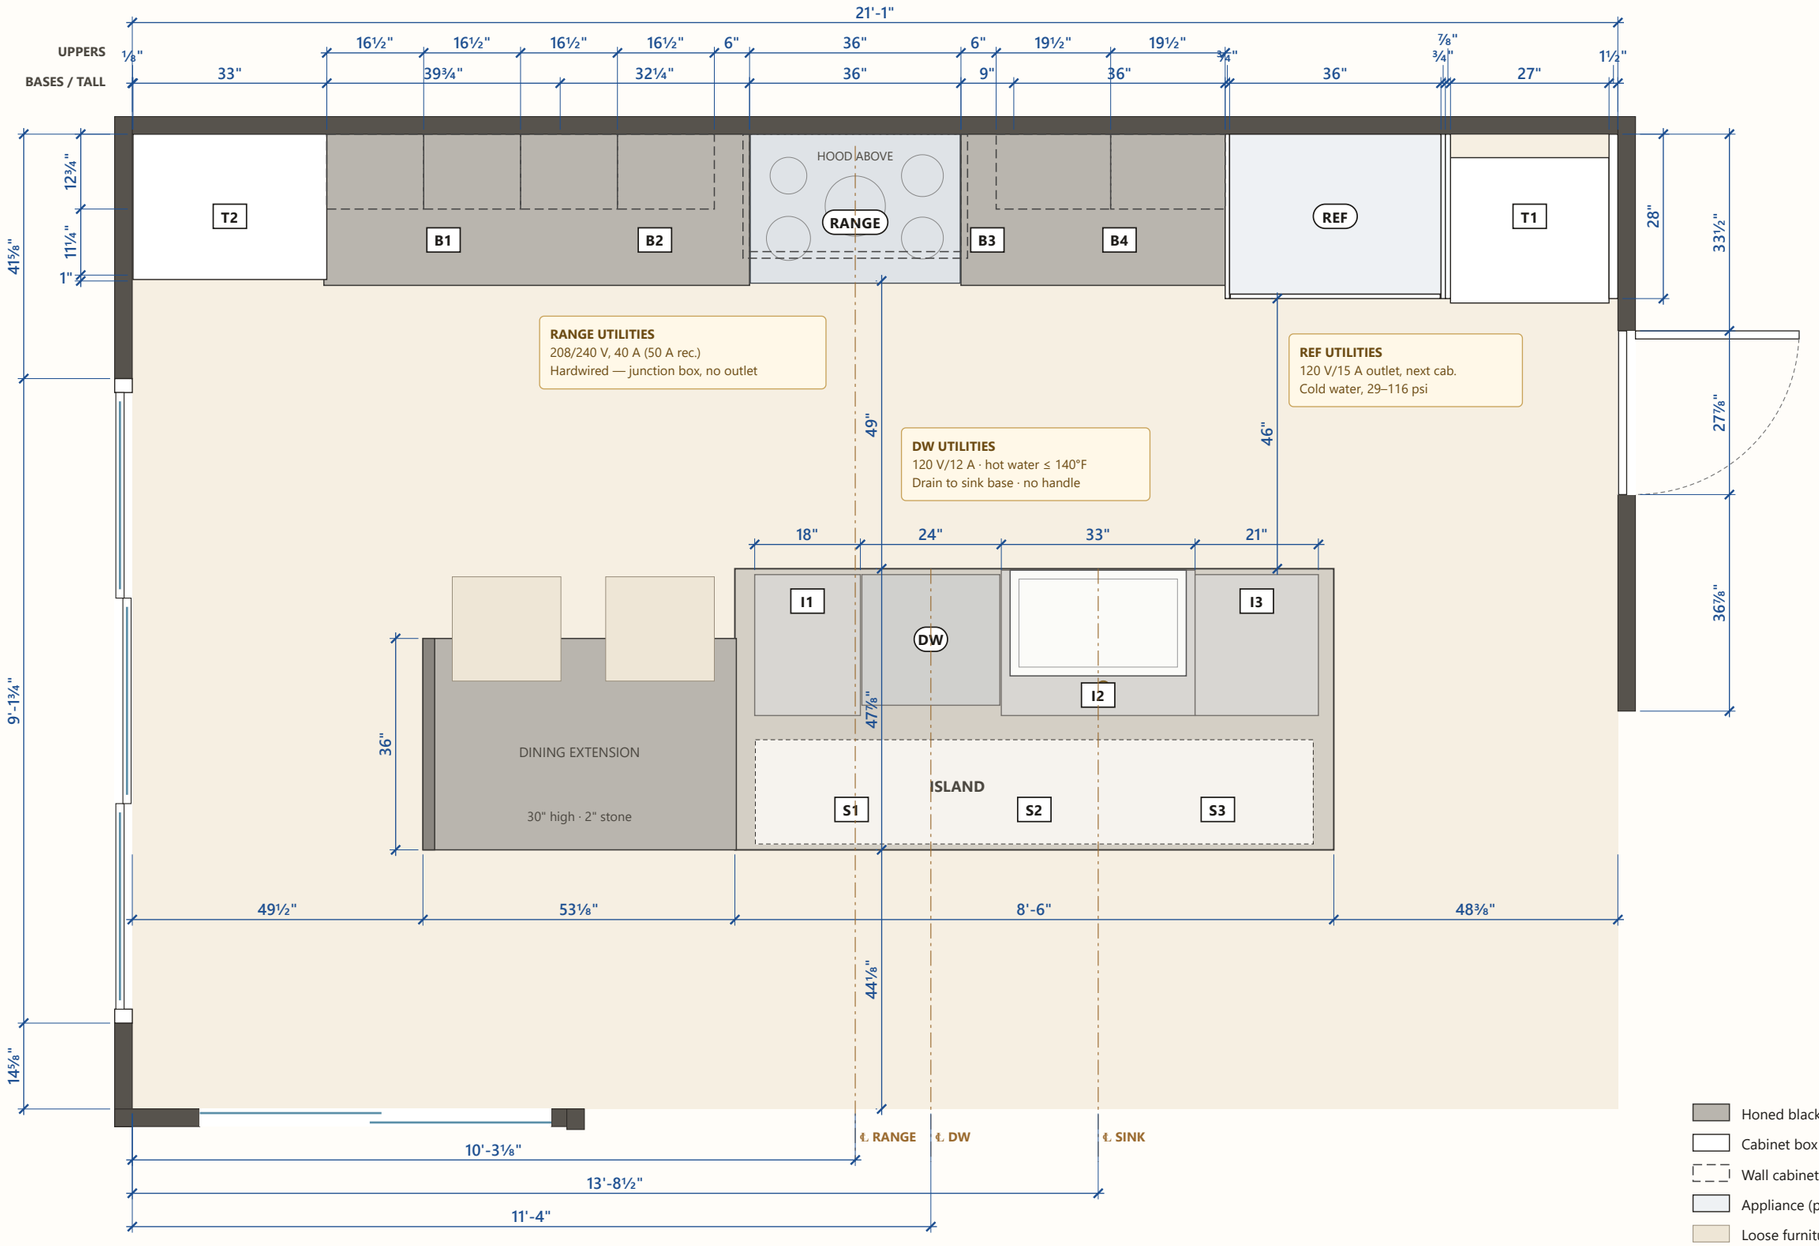

Honed black stone (all counters)
Cabinet box
Wall cabinet / hood above
Appliance (panel-ready)
Loose furniture

1 **KITCHEN PLAN**

≈ 1/2" = 1'-0" at 11×17 (reduced to fit) — use dimensions · dashed = cabinets/hood above

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

KITCHEN PLAN — DIMENSIONED

Cabinet runs, island location,
clearances and rough-in centerlines

A-102

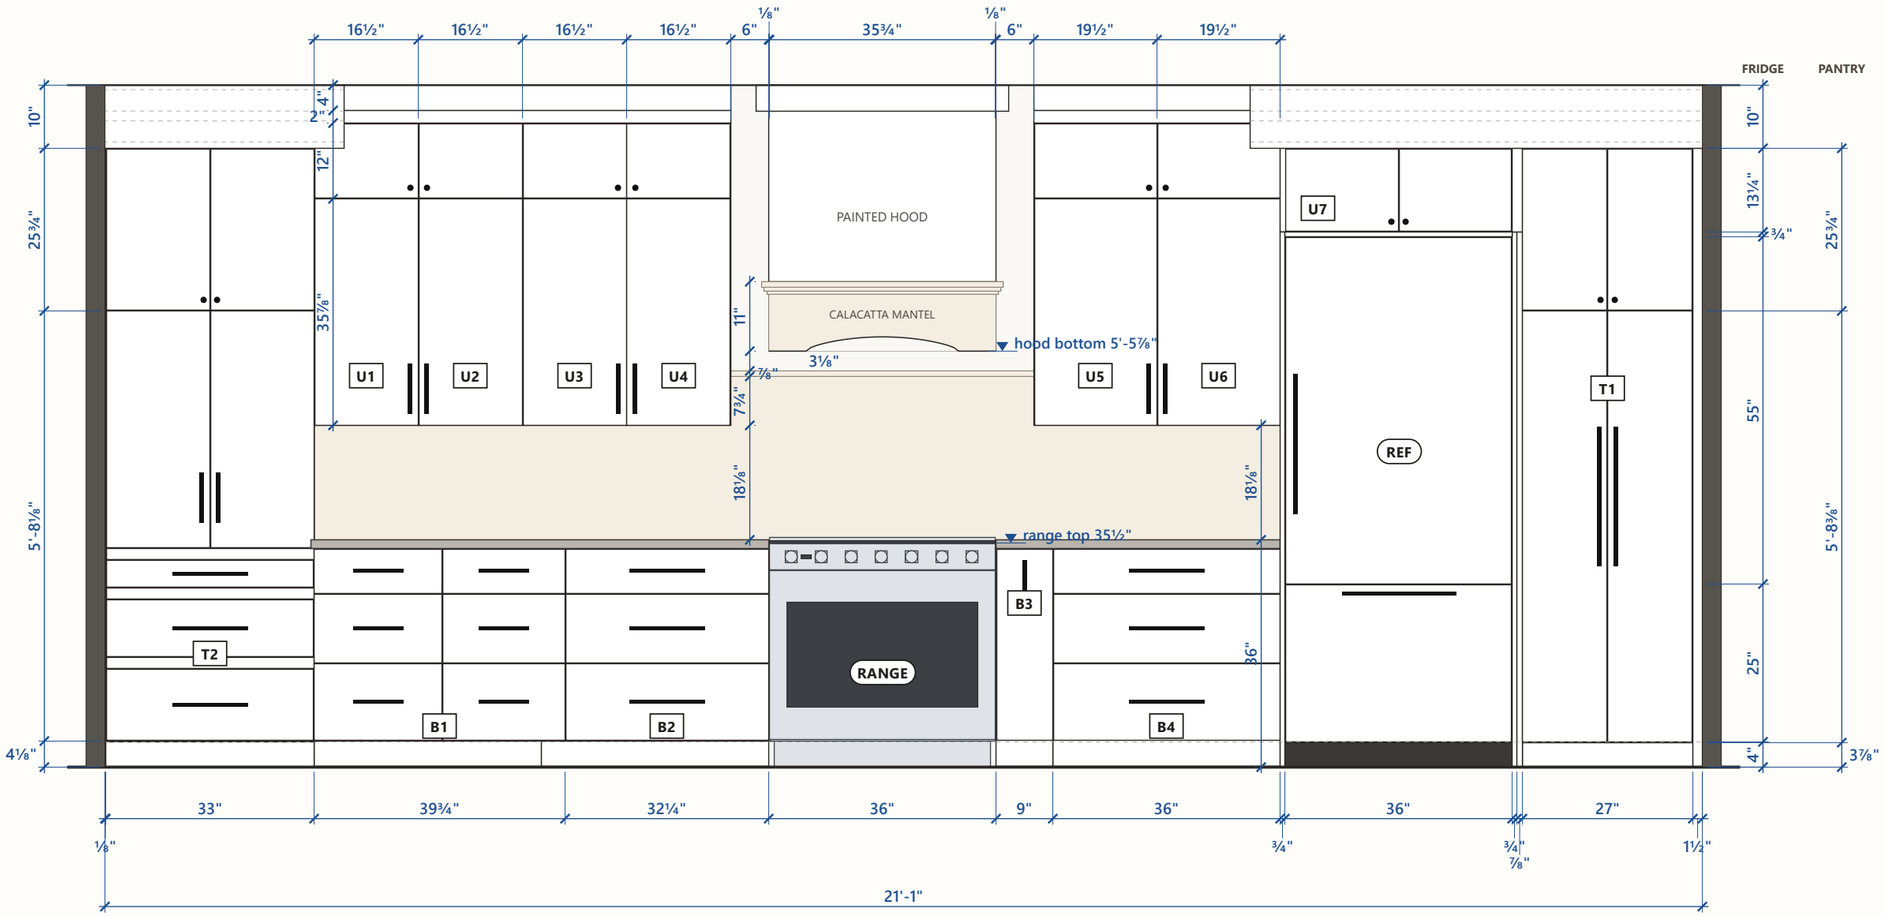

1 **CABINET WALL ELEVATION**

1/2" = 1'-0" at 11×17 · looking at the back wall from the room

Backsplash: the owner's Calacatta marble slab (white, gray/gold diagonal veining), 2cm, full height from the counter to the underside of the uppers (18⅛") along the whole run. In the range bay the slab stops 4" below the hood (5'-1⅞" AFF) and is capped by a ⅞"-thick marble ledge, 3½" deep from the wall; painted wall between the ledge and the hood.

Hood: straight painted cream box 36" wide × 20" deep, from the mantel to the ceiling, crown at the ceiling; ≈6" of painted wall to the uppers each side. Mantel in the same Calacatta as the backsplash, flush with the box: 9" front apron arching up 2¼" between 5⅞" legs, sides to the wall, 2" three-row stepped cornice on top (only the cornice projects, 1⅛"). Concealed vent insert (3 baffle filters, 2 lights) 6⅝" up inside, dark surround. Hood bottom 5'-5⅞" AFF = 30" above the cooktop (A-301).

Left appliance tower T2: floor to the cabinet top (8'-2" AFF), base-cabinet depth, three drawers (rows level with the B1 run) under tall double doors, short doors above (split level with T1), on a flush painted apron with arched feet. The left counter stops at the tower. Both towers and the fridge column are capped by a classical cornice (bead, frieze, bed cove, cyma crown) from the cabinet top to the ceiling, ≈4¾" proud of the doors; the right cornice runs continuously over the fridge column and T1.

Uppers U1–U6 are stacked: a tall door with a 12" top door above; they rise into a 2" painted soffit (flush with the door faces) under the 4" top band to the ceiling.

Hardware: every back-wall drawer — polished-brass bar pulls with acorn finials (8"; 12" on drawers over 24" wide); B3 spice pull-out 8" vertical near the top. U1–U6: 8" vertical finial pulls low at the meeting stiles of each pair. U7: small polished-brass knobs (~1") at the bottom meeting corners. T2: 12" finial pull centred on each drawer, 8" vertical finial pulls low at the tall doors' meeting stiles, small brass knobs on the upper doors. Fridge, freezer drawer and T1 garage doors: finial bar pulls (22⅛" on the door and garage, 18⅛" on the freezer drawer, model). 12" top doors (U1–U6): small polished-brass knob plumb over the pull below, low on the door.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

CABINET WALL ELEVATION


Back wall: left tower, stacked uppers, range & mantel hood, fridge, pantry

A-201

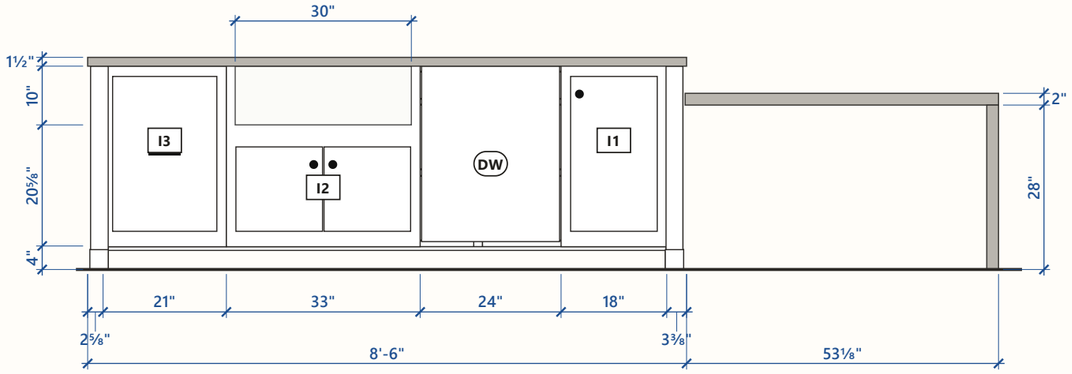


1 ISLAND — WORKING SIDE (SINK / DISHWASHER)

≈ 1/2" = 1'-0" (reduced) · seen from the range

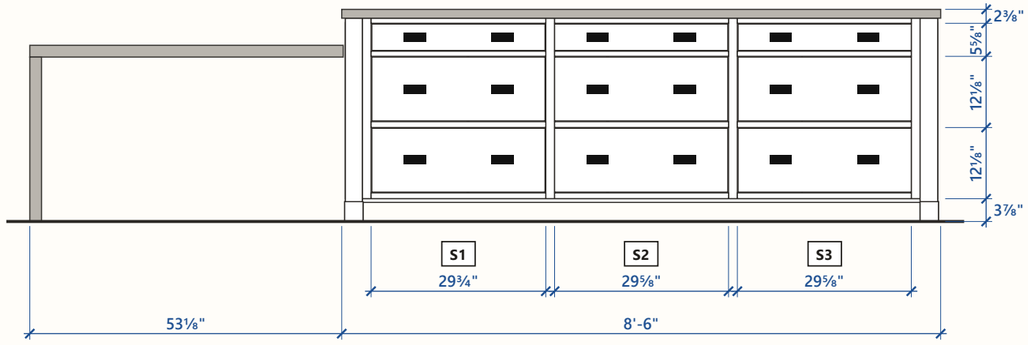


2 ISLAND — SEATING SIDE (STORAGE)

≈ 1/2" = 1'-0" (reduced) · seen from the living room · opening widths, 1½" stiles

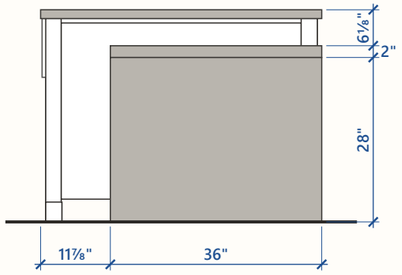

3 ISLAND — LEFT END WITH DINING EXTENSION

≈ 1/2" = 1'-0" (reduced) · seen from the Breakfast end

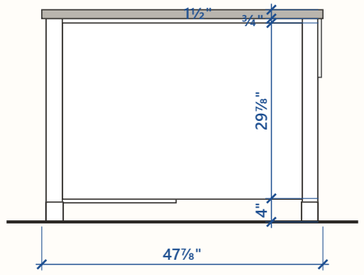

4 ISLAND — RIGHT END (HALL SIDE)

≈ 1/2" = 1'-0" (reduced)

Island body: painted cream to match the perimeter cabinets, square corner posts to the floor in polished-nickel corner caps, paneled ends. Open base, no toe kick: the cabinetry stops 3⅞" above the floor all round (a painted bottom panel closes the drawer side; the dishwasher panel still runs to the floor). Seating side: 3 columns, each a short flat slab drawer over two deep inset beaded drawers, with Ashley Norton MB5120 Faux Screw Bin Pulls, Distressed Brass (DBS) — two on every drawer, top drawers included (18 total). Top: honed black stone with an ogee edge, overhangs the body ½"–⅞" on all sides (model).

Working side (faces the range): 18" door base, 24" dishwasher with custom panel, 33" sink base with 30" apron-front sink, 21" double trash pull-out.

Dining extension butts the left end: 2" stone slab, 30" high, waterfall leg at the free end, flush with the island's seating (living-room) side.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

ISLAND ELEVATIONS

Working side, seating side and both ends


A-202

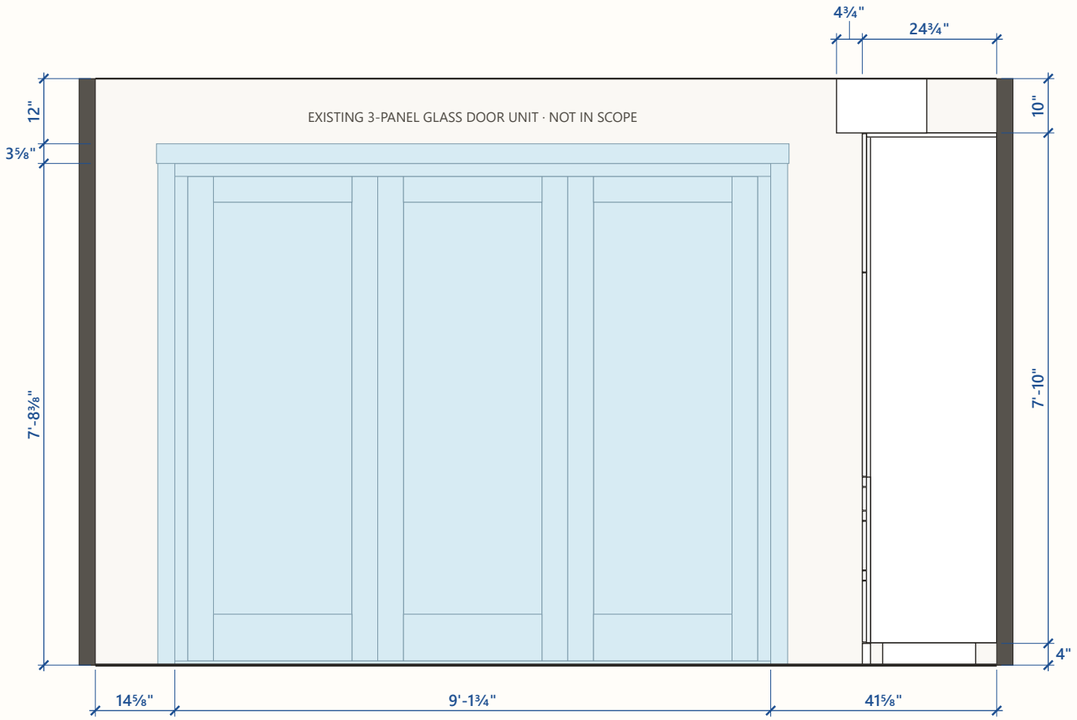

1 BREAKFAST (LEFT) WALL

≈ 1/2" = 1'-0" (reduced) · seen from the room · cabinet wall at right

The existing 3-panel full-height glass door unit on this wall stays as it is (from the owner's photos). The 2-panel sliding door is around the corner on the porch wall (see A-101). The left appliance tower T2 and its cornice return against this wall — scribe to the wall.

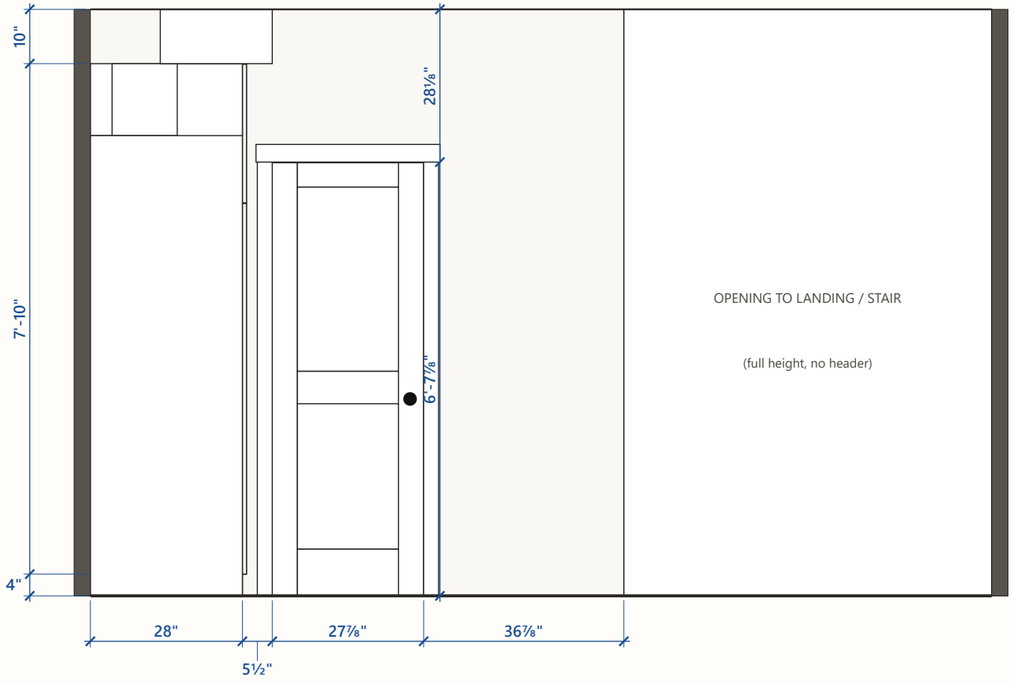

2 HALL (RIGHT) WALL

≈ 1/2" = 1'-0" (reduced) · seen from the room · cabinet wall at left

The doorway to the small back room / pantry behind the kitchen gets a new painted two-panel swing door (27⅞" × 6'-7⅞" opening), hinged at the back-wall end, with brushed-nickel 2¼" knobs on both faces. Swing drawn into the back room (assumed — confirm with the owner; the kitchen side has the pantry T1 and the fridge aisle). The hall closet door gets a matching brushed-nickel knob.

The opening to the landing has no header: it runs to the ceiling. The stair beyond goes UP along the charcoal wall toward the living-room end (see A-101).

Pantry side is closed with a 1½" filler to the wall (model). Tall cabinets and fridge panels stand 4" proud of the base cabinet faces (28" deep); the cornice above returns against this wall.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

SIDE WALL ELEVATIONS


Breakfast wall (glass doors, left tower) and hall wall (pantry end, back-room door, landing opening)

A-203

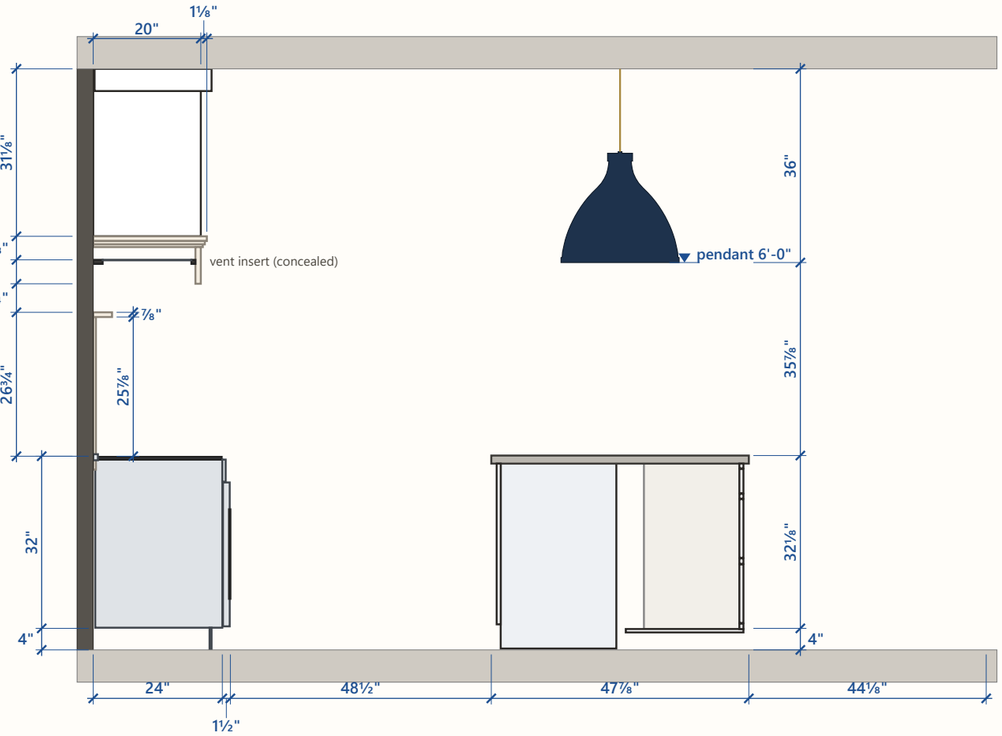

A SECTION A — THROUGH RANGE, HOOD & DISHWASHER

≈ 3/8" = 1'-0" · cut elements only

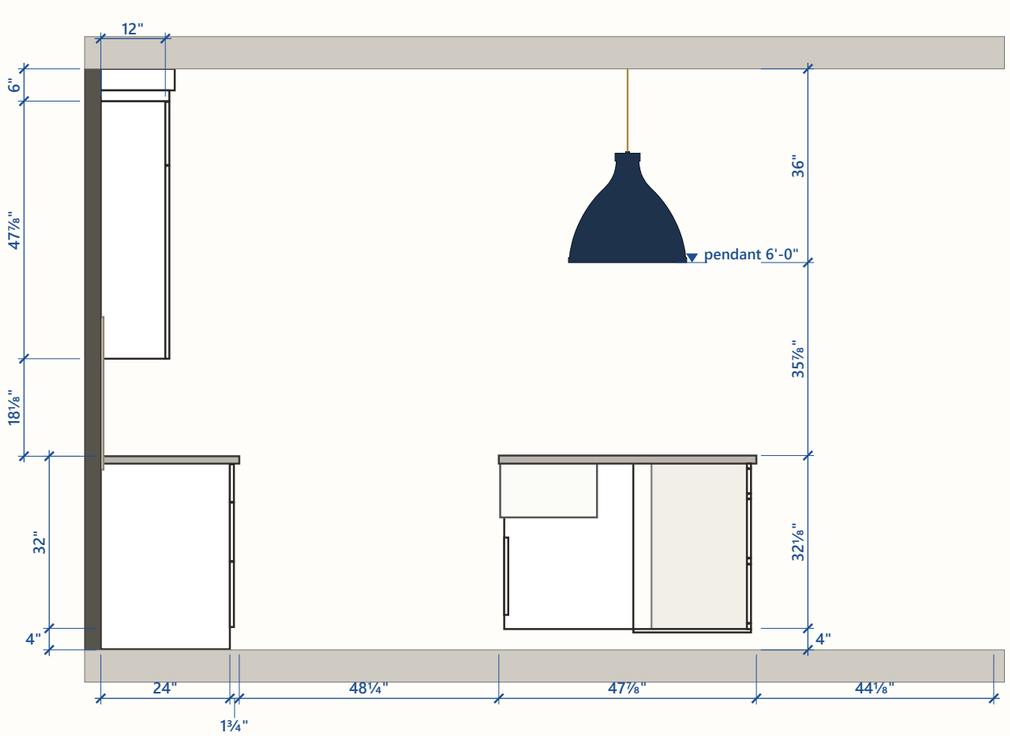

B SECTION B — THROUGH SINK BASE & 19½" UPPER U6

≈ 3/8" = 1'-0" · cut 13" right of sink ℄ · nearest pendant shown beyond

Clearances (model):

- Aisle between back counter edge and island top: 49".
- Fridge panels to island top: 46" (fridge door swings into this aisle).
- Island seating side to Breakfast/porch wall: 44⅛" (Breakfast end).
- Island right end to hall wall: 48¼".

Pendants: Hudson Valley Painted No. 3 (MDS362-AGB/DBL), shade bottom 6'-0" AFF, 35⅞" above the island top. Section A cuts the hood at the crown of the mantel arch. Range hood: bottom (mantel legs) 5'-5⅞" AFF, 30" above the cooktop; filters 6'-½" AFF, concealed in the mantel. Confirm the insert maker's mounting height and the duct route.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

SECTIONS

Depths, clearances and heights through the range & mantel hood and the sink

A-301

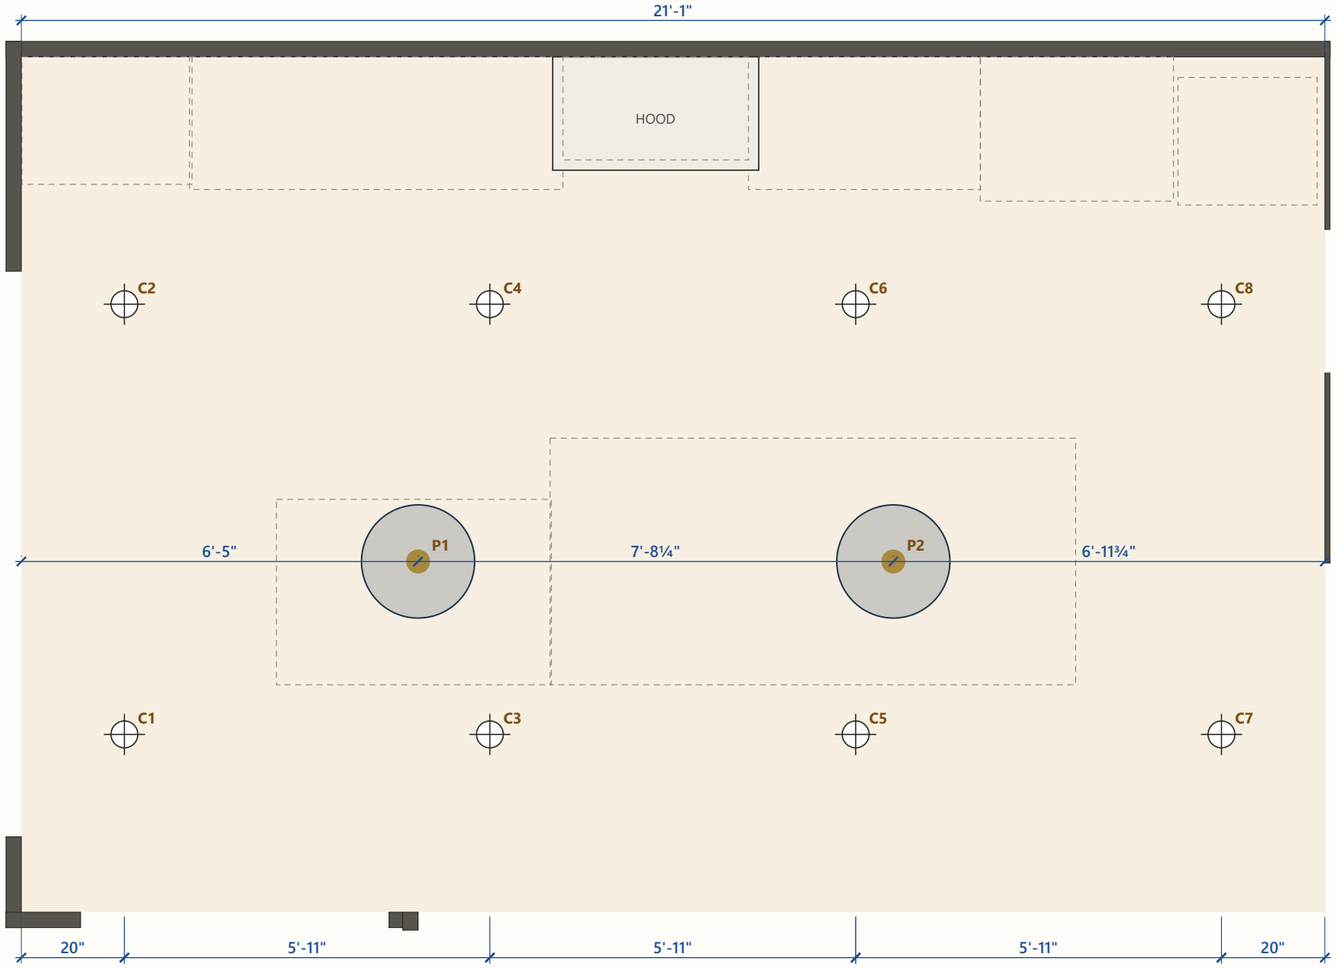

1 **REFLECTED CEILING PLAN**

≈ 3/8" = 1'-0" · ceiling 9'-0" · counters shown dashed for reference

FIXTURE LOCATIONS

Tag	Fixture	X from left wall	From back wall	Height
C1	Recessed downlight (≈5" tri…	20"	10'-11½"	in ceiling
C2	Recessed downlight (≈5" tri…	20"	48"	in ceiling
C3	Recessed downlight (≈5" tri…	7'-7"	10'-11½"	in ceiling
C4	Recessed downlight (≈5" tri…	7'-7"	48"	in ceiling
C5	Recessed downlight (≈5" tri…	13'-6"	10'-11½"	in ceiling
C6	Recessed downlight (≈5" tri…	13'-6"	48"	in ceiling
C7	Recessed downlight (≈5" tri…	19'-5"	10'-11½"	in ceiling
C8	Recessed downlight (≈5" tri…	19'-5"	48"	in ceiling
P1	Painted No. 3 pendant (HVL)	6'-5"	8'-2"	bottom 6'-0" AFF
P2	Painted No. 3 pendant (HVL)	14'-1¼"	8'-2"	bottom 6'-0" AFF

Locations are fixture centers. Downlights C1–C8 in two rows of four: C2/C4/C6/C8 4'-0" and C1/C3/C5/C7 10'-11½" out from the back wall; the end cans 20" in from each side wall, the rest evenly between (5'-11" on centre). Adjust to the joists. Hood insert has 2 integral lights. No wall sconces and no under-cabinet lights in the design. Pendants P1/P2: Hudson Valley Lighting Painted No. 3, MDS362-AGB/DBL (aged brass / darkest blue), 22½" dia. × 25" H shade, ring-and-bar chain to an aged-brass canopy; the model uses 3 lamps behind a white glass diffuser — verify lamping with the HVL spec sheet. Switching, outlets and circuits are not in the model — lay these out to code (GFCI/AFCI, island receptacle, 240 V range).

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction


NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of left wall / back wall.

LIGHTING / REFLECTED CEILING PLAN

Fixture locations from the design model

A-401

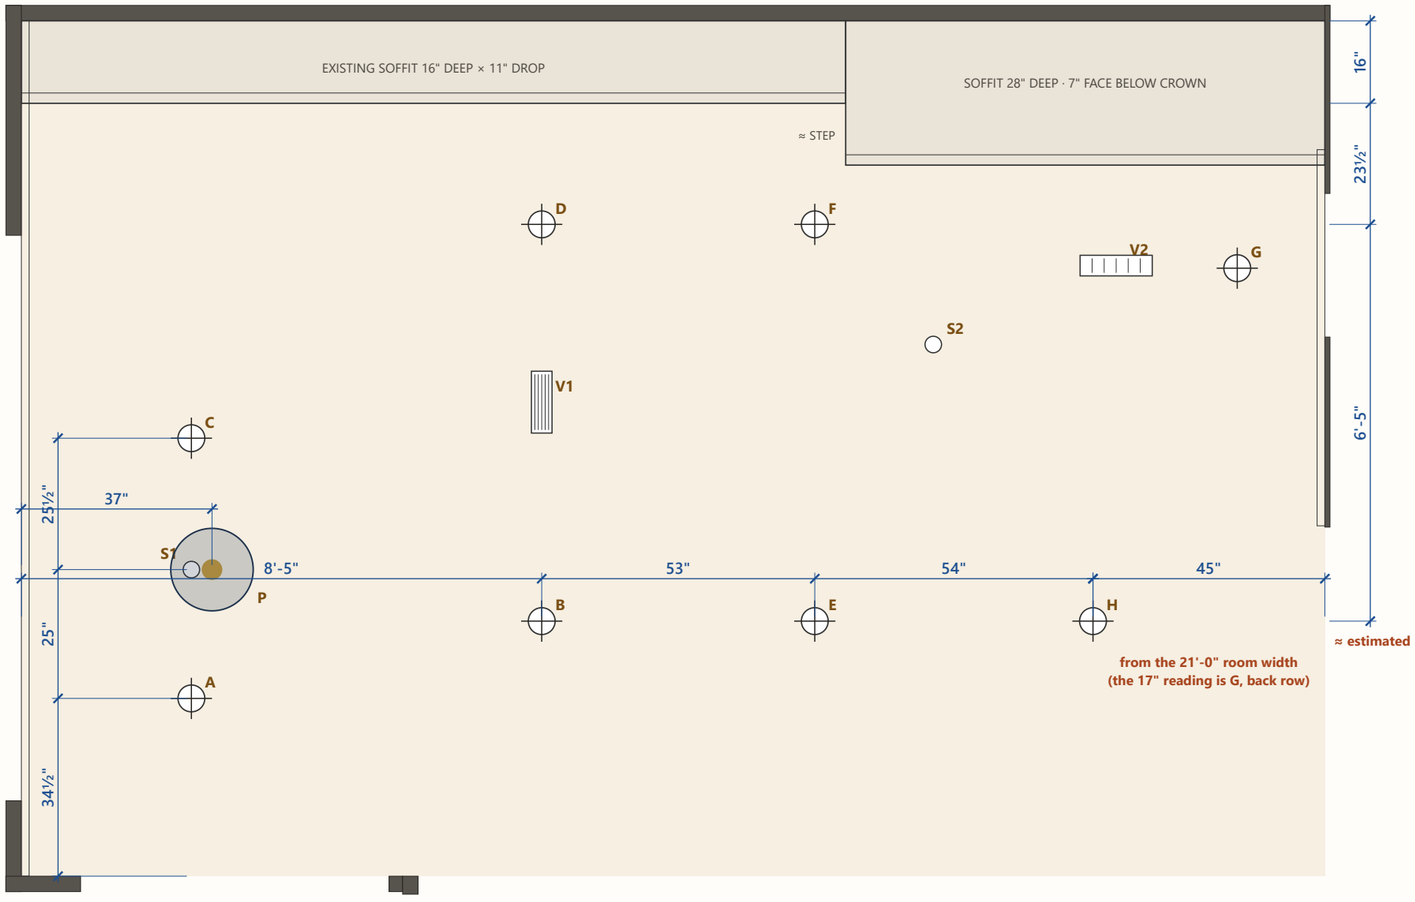

EXISTING CEILING ITEMS

Tag	Item	From left wall	From back wall
A	Recessed can, adjustable trim — 34½" off t…	≈ 33"	10'-11½"
S1	Small round ceiling device (sensor / speak…	≈ 33"	8'-10½"
C	Recessed can, adjustable trim — 25½" from …	≈ 33"	6'-9"
P	Existing saucer pendant — 3'-1" off the wi…	37"	≈ 8'-10½"
B	Recessed can — 8'-5" off window wall, 6'-5…	8'-5"	≈ 9'-8½"
D	Recessed can — 20½" off the soffit crown	≈ 8'-5"	≈ 39½"
E	Recessed can — 4'-5" from B	12'-10"	≈ 9'-8½"
F	Recessed can (back row)	≈ 12'-10"	≈ 39½"
H	Recessed can — 4'-6" from E	17'-4"	≈ 9'-8½"
G	Recessed can (back row) — 17" off the righ…	19'-8"	≈ 48"
S2	Small round device — 6'-4" off right wall,…	14'-9"	≈ 5'-2⅞"
V1	Supply grille ≈ 4×12 — 4'-1" off the soffi…	≈ 8'-5"	6'-2"
V2	Supply slot ≈ 14×4 — 33½" off right wall, …	17'-8½"	47½"

Site measurements (owner, iPhone Measure): A–S1 25", S1–C 25½", A to the slider wall 34½", pendant to the window wall 3'-1", window wall to B 8'-5" (through the pendant), B–E 4'-5", E–H 4'-6", room width at the back wall 21'-0" (model 21'-1"), D (back row) to the soffit crown 20½", D–B 6'-5", soffit 16" deep × 11" drop (left of the step), V1 4'-1" off the soffit crown, V2 33½" off the right wall and 14½" off the soffit crown, right soffit 28" deep with a 7" face below its crown, S2 6'-4" off the right wall and 3'-11" from the inside corner of the soffit step. Window-wall and right-wall distances were taken to the crown edge (crown ≈ 3–4" more to the wall face). Everything marked ≈ is placed from the photos and the model's room size (21'-1" × 13'-10") and must be verified before it is used for layout.

Notes: the measured 21'-0" room width confirms the model, so H sits about 45" off the right wall; the 17" right-wall reading belongs to G in the back row (photo with V2), not H. An earlier 4'-7" A–B reading does not fit (A–B scales to about 5'-9⅝") and is not used. Still to measure: where the soffit step is from the window wall (drawn ≈ 13'-4", worked back from S2); the smoke detector and the small device near the living room (seen in the wide photo, not drawn).

This sheet is the existing condition only; the new lighting design is on A-401. The existing soffit would come out: the new cabinets, soffit and band (A-201) run to the ceiling.

1 **EXISTING REFLECTED CEILING PLAN**

≈ 3/8" = 1'-0" · ceiling 9'-0" (model) · blue = measured on site, ≈ = estimated from photos

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction

NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of
left wall / back wall.

EXISTING CEILING — SITE SURVEY

As-built from the owner's photos & measurements, 2026-10-28

A-402

CABINET SCHEDULE

Tag	Description	Location	Width	Height	Depth	Bottom AFF	Fronts / hardware
B1	Base — 2 drawer stacks × 3 (18¾" + 18")	Back wall, left drawer run (next to T2)	39¾"	34½"	23¼"	⅛"	8" polished-brass acorn-finial bar pull, centered on each drawer
B2	Base — wide drawer stack × 3 (30¾")	Back wall, left of range	32¼"	34½"	23¼"	⅛"	12" polished-brass acorn-finial bar pull, centered on each drawer
B3	Base — spice pull-out, full height (1 front)	Back wall, right of range	9"	34½"	24¾"	⅛"	8" polished-brass acorn-finial bar pull, vertical near the top
B4	Base — 3 drawers	Back wall, left of fridge	36"	34½"	24¾"	⅛"	12" polished-brass acorn-finial bar pulls, centered
U1	Wall cabinet, stacked — 1 tall door + 12" top door, hinged left	Back wall, left of hood	16½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U1/U2 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U2	Wall cabinet, stacked — 1 tall door + 12" top door, hinged right	Back wall, left of hood	16½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U1/U2 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U3	Wall cabinet, stacked — 1 tall door + 12" top door, hinged left	Back wall, left of hood	16½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U3/U4 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U4	Wall cabinet, stacked — 1 tall door + 12" top door, hinged right	Back wall, left of hood	16½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U3/U4 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U5	Wall cabinet, stacked — 1 tall door + 12" top door, hinged left	Back wall, right of hood	19½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U5/U6 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U6	Wall cabinet, stacked — 1 tall door + 12" top door, hinged right	Back wall, right of hood	19½"	47⅞"	12¾"	54⅛"	8" polished-brass acorn-finial bar pull, vertical, low at the meeting stile (U5/U6 pair); 12" top door: ~1" polished-brass knob plumb over the pull, low on the door
U7	Wall cabinet over fridge — 2 doors, up to cornice	Above refrigerator	38⅜"	13¼"	12"	7'-¾"	~1" polished-brass knobs, bottom meeting corners; doors run from the fridge top panel to the cornice (3" shaker frame)
T2	Left tower — 3 drawers under 2 tall doors + 2 upper doors	Back wall, Breakfast end	33"	8'-2"	24¾"	0"	drawers: 12" acorn-finial bar pull, centred; tall doors: 8" finial pulls, vertical, low at the meeting stiles; upper doors: ~1" brass knobs
T1	Tall pantry / appliance garage — 2 tall doors + 2 upper doors	Back wall, hall end	27"	7'-10⅛"	24¾"	3⅞"	tall doors: polished-brass acorn-finial bar pulls; upper doors: ~1" brass knobs
I1	Island base — 1 door	Island, working side	18"	30⅞"	24"	3⅞"	3624 step knob (NB)
I2	Island sink base — 2 doors, 30" apron-front sink	Island, working side	33"	30⅞"	24¾"	3⅞"	3624 step knobs (NB), doors below apron sink
I3	Island base — double trash pull-out	Island, working side	21"	30¾"	24"	3⅞"	MB5341 Classic Pull 5⅛" (DBS)
S1	Island seating-side storage — 3 drawers (short top, 2 deep)	Island, living-room side	29¾"	30⅝"	17¾"	4"	MB5120 bin pulls (DBS): 2 on every drawer
S2	Island seating-side storage — 3 drawers (short top, 2 deep)	Island, living-room side	29¾"	30⅝"	17¾"	4"	MB5120 bin pulls (DBS): 2 on every drawer
S3	Island seating-side storage — 3 drawers (short top, 2 deep)	Island, living-room side	29¾"	30⅝"	17¾"	4"	MB5120 bin pulls (DBS): 2 on every drawer

APPLIANCES & FIXTURES

Tag	Model	Type	Opening in model (W × H × D)	Notes for the GC
RANGE	Bosch HIS5657U	36" freestanding induction range	36" between cabinets, counter 36"	208/240 V, 40 A (50 A rec.), HARDWIRED to a junction box; ℄ 10'-3⅛" from left wall
REF	Thermador T36IB100SP	36" built-in, panel-ready, single door over freezer drawer	36" × 7'-0" × 28"	Spec cutout 84 × 36 × 25 ✓; 120 V/15 A outlet + cold water in the adjacent cabinet; ¾" panels
DW	Thermador Sapphire DWHD660EPR	24" panel-ready (fully integrated)	24" between cabinets, under 34⅝" top	Spec 24" min. ✓; 120 V/12 A, hot water, drain to sink base; push-to-open panel, NO handle
SINK	Rohl 30" fireclay apron-front	Single bowl, apron front, in 33" sink base I2	30" × 18", apron top at counter	Sink ℄ 13'-8½" from left wall; stone notched around apron
HOOD	Painted box hood + marble mantel	Concealed insert: 3 baffle filters, 2 lights	36" W × 20" D box to ceiling, bottom 5'-5⅞" AFF	9" Calacatta mantel (arched apron, 3-row cornice), crown at ceiling; insert 6⅝" up inside; duct + make-up air per code
SLAB	Owner's Calacatta marble slab	Backsplash, ledge and hood mantel, 2cm	12'-9" run, counter to uppers (18⅛")	Range bay: slab to 5'-1⅞" AFF + 1" × 3" ledge, 4" under the hood; mantel in the same slab — template with the hood
FAUCET	Brass gooseneck, side lever	Single hole	behind sink ℄	Hole at sink ℄, ≈1¾" behind bowl

Finishes (design intent): all cabinetry (towers, fridge panels, uppers, bases, island) painted greige-cream, approx. Benjamin Moore Revere Pewter HC-172 (custom match ≈ #D0CABC; final color by owner sample); beaded shaker, flat slab top drawers, full overlay (island inset); stacked uppers into a 2" soffit under the 4" top band; classical cornice on both towers and the fridge column. Counters (perimeter and island, ogee edge) and dining extension (waterfall): honed black stone, soapstone look. Backsplash: the owner's Calacatta slab, counter to uppers, with a marble ledge in the range bay. Hood: painted box with a Calacatta marble mantel and crown. Hardware: polished-brass acorn-finial bar pulls (back-wall drawers, U1–U4, T2, fridge, appliance garage), polished-brass knobs (U5–U7, tower upper doors), 3624 NB step knobs (island doors), MB5120 DBS bin pulls (island); brushed-nickel door knobs; brass faucet; chevron oak floor.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction

NOTES

1. Dimensions from the design model. Verify all dimensions in field.
2. Do not scale drawings.
3. Heights are above finished floor.
4. Plan dims from inside face of left wall / back wall.

CABINET & APPLIANCE SCHEDULES

Sizes from the design model — confirm with shop drawings

A-501

APPLIANCE REQUIREMENTS

From the UAKC spec package, invoice 255075, v2.2 (Oct 20, 2026). ✓ = the design meets the spec. Always confirm against the installation guide in the box.

REF — Thermador T36IB100SP

36" built-in bottom-freezer refrigerator, panel-ready

CUTOUT & CLEARANCES	Spec	Design	
Cutout width	36"	36"	✓
Cutout height	84"	7'-0"	✓
Cutout depth	≥ 25"	28"	✓
Finished side returns	flush, ≥ 4" deep	28"	✓

POWER, WATER & DRAIN

- 120 V, 60 Hz, 15 A; 3-prong plug, 118" cord
- Outlet in an ADJACENT cabinet (preferred); behind the unit only if it can be switched off at the breaker
- Cold water line, 29–116 psi, reachable from the next cabinet
- Lines route through the recess at the base of the unit

PANELS & INSTALL

- Custom panels ¾" thick (clearances assume ¾")
- Door panel max 121 lb; drawer panels max 66 lb / 103 lb
- Door swing 115° max, 90° min to reach every drawer
- Unit height adjusts 83 9/16–85½" (83⅞" for an 84" niche)

RANGE — Bosch HIS5657U

36" 500 Series freestanding induction range

CUTOUT & CLEARANCES	Spec	Design	
Cutout width	36"	36"	✓
Counter depth	≥ 25"	25¾"	✓
Cooktop to hood bottom	≥ 30"	30"	✓
Counter to upper cabinets	≥ 18"	18⅛"	✓
Upper cabinet depth	≤ 13"	12¾"	✓

POWER, WATER & DRAIN

- 208/240 V, 60 Hz; 40 A breaker (50 A recommended), 8,400 W
- HARDWIRED — no cord: junction box, not a receptacle
- Anti-tip bracket (included) must be installed
- Zero clearance to the side cabinets below the counter

PANELS & INSTALL

- Freestanding, stainless; 35 15/16" W, 26 19/64" deep incl. bull nose
- Height adjusts 35¾–36¾" — set flush with the 36" counter

DW — Thermador Sapphire DWHD660EPR

24" custom-panel dishwasher

CUTOUT & CLEARANCES	Spec	Design	
Cutout width	24" min. (23⅝–24¼)	24"	✓
Cutout height (to underside of top)	33⅞–35"	34⅝"	✓
Cutout depth	24"	24"	✓
Toe kick height	3⅝–7½"	4"	✓

POWER, WATER & DRAIN

- 120 V, 60 Hz, 12 A; 67" cord (reaches 45" left / 56" right of the unit's corner)
- Hot water ≤ 140°F, ≥ 14 psi
- Drain hose 90½" — run to the sink base I2 (extension SGZ1010UC if needed)
- Optional install kit SMZ3IN1UC (junction box, 90° elbow, supply hose)

PANELS & INSTALL

- Custom panel 23⅛–23⅜" W (24" allowed by cabinet design) × 27½–30⅛" H × ⅝–⅞" thick, 11–18 lb
- PUSH-TO-OPEN — no handle on the panel
- Panel height measured from the underside of the countertop

DESIGN CHANGES MADE FOR THESE SPECS (Oct 21, 2026)

- Refrigerator opening reduced from 37" to 36": ¾" end panels each side, plus a ⅞" filler between the right panel and the pantry.
- Dishwasher opening widened from 23¾" to 24": the 18" door base I1 slides ¼" toward the island end (it had ⅞" spare).
- Dishwasher panel has no handle — the Sapphire opens with a push.

KITCHEN REMODEL

Jane's Kitchen

Cabinet & layout dimensions

Issued 2026-11-04

For coordination — not for construction

NOTES

Dimensions from the design model.
Verify all dimensions in field.
Do not scale drawings.
Heights are above finished floor.
Plan dims from inside face of left wall / back wall.

APPLIANCE REQUIREMENTS

Manufacturer specs checked against the design

A-502